

TIGER Neo

60HL4-V

495-515 Watt

MONO-FACIAL MODULE

N-type



N-type Technology

N-type modules with Tunnel Oxide Passivating Contacts (TOPCon) technology offer better low light performance.




HOT 3.0 Technology

N-type modules with JinkoSolar's HOT 3.0 technology offer better reliability and efficiency.



Mechanical Load Enhanced

Certified to withstand:
5400 Pa front side max static test load;
2400 Pa rear side max static test load

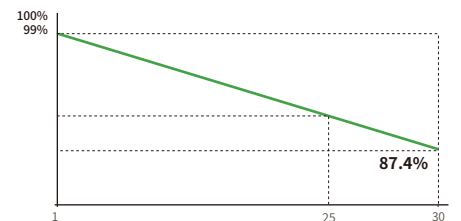

25 Year Product Warranty	30 Year Linear Power Warranty	1 % First-year Degradation	0.40 % Annual Degradation Over 30 Years
------------------------------------	--	---	--

- IEC61215:2021 / IEC61730:2023
- ISO9001:2015: Quality Management System
- ISO14001:2015: Environment Management System
- ISO45001:2018: Occupational health and safety management systems



60HL4-V 495-515 Watt

Mechanical Characteristics

Cell Type	N-type Mono-crystalline
No. of cells	120 (60×2)
Dimensions	1906×1134×30 mm
Weight	22.5 kg
Front Glass	3.2mm, Anti-reflection Coating, High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68 Rated
Protection Class	Class II
IEC Fire Type	Class C
Connector Type	JK03M, JK03M2 (JinKO)/MC4-EVO2 (Staubli)
Output Cables	4.0 mm ² (+): 400 mm, (-): 200 mm or Customized Length

Packaging Configuration

Pallet Dimensions	1936×1140×1249 mm
Packing detail (Two pallets=One stack)	37 pcs/pallets, 74 pcs/stack, 888 pcs/40'HQ Container

Specifications (STC)


Maximum Power – Pmax [Wp]	495	500	505	510	515
Maximum Power Voltage – Vmp [V]	36.62	36.79	36.97	37.15	37.33
Maximum Power Current – Imp [A]	13.52	13.59	13.66	13.73	13.80
Open-circuit Voltage – Voc [V]	44.07	44.21	44.36	44.51	44.66
Short-circuit Current – Isc [A]	14.09	14.17	14.25	14.33	14.41
Module Efficiency STC [%]	22.90	23.13	23.36	23.59	23.82
Power Measurement Tolerance	± 3%				
Power Sorting	-5W ~ +15W				
Temperature Coefficients of Pmax	-0.29 %/°C				
Temperature Coefficients of Voc	-0.25 %/°C				
Temperature Coefficients of Isc	0.045 %/°C				

STC: Irradiance 1000W/m², Cell Temperature 25°C, AM=1.5

Application Conditions

Operating Temperature	-40 °C ~ +70°C
Maximum System Voltage	1500 VDC (IEC)
Maximum Series Fuse Rating	25 A

Engineering Drawings

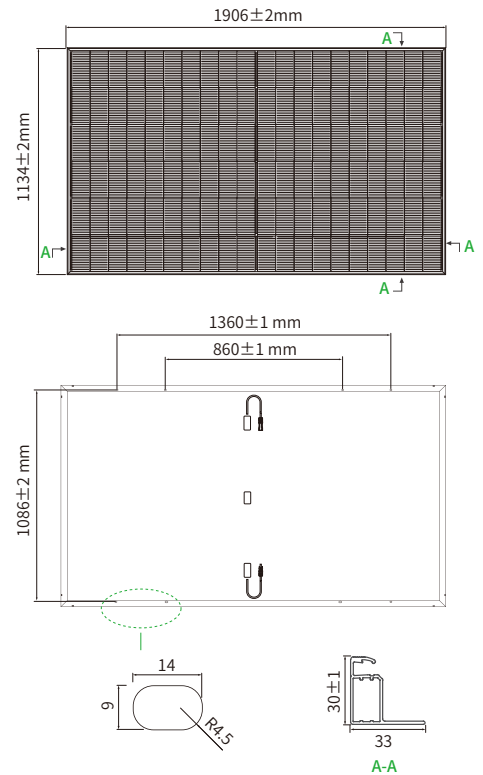

*Note: For specific dimensions and tolerance ranges, please refer to the corresponding detailed module drawings.

Electrical Performance

